


DIRECT
SLIM

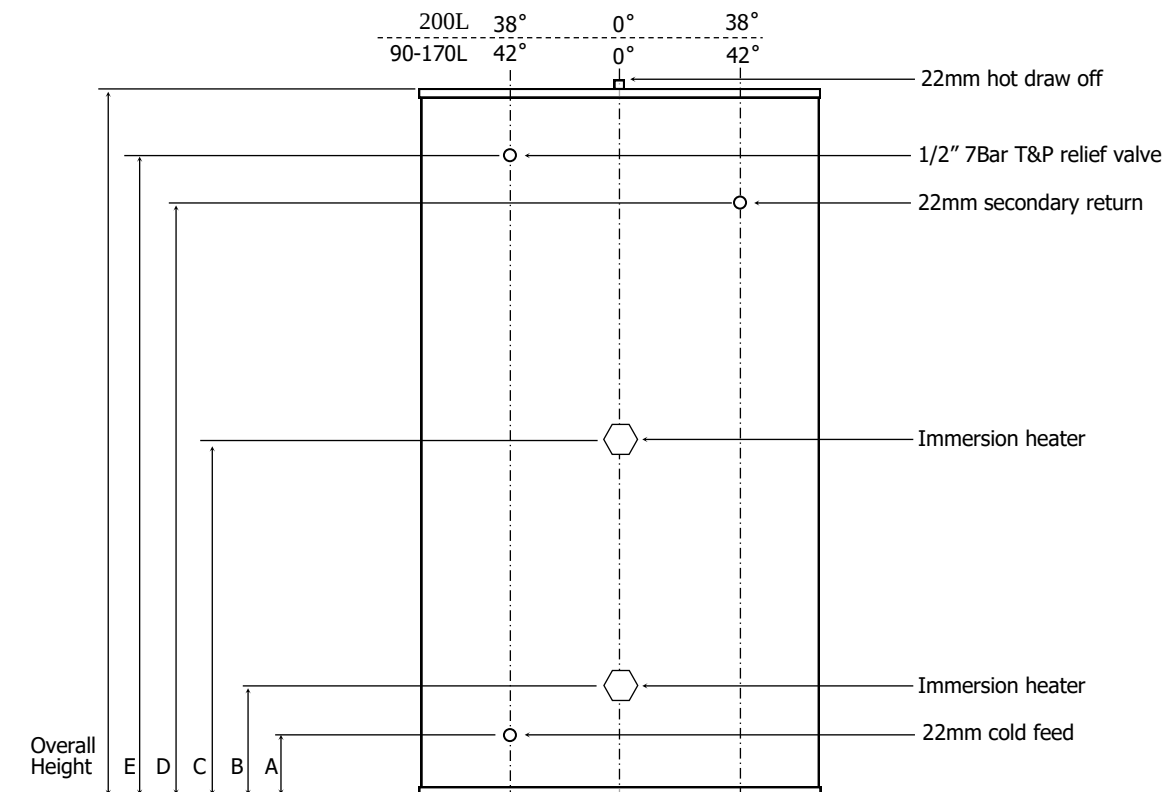

All unvented cylinders come with an unvented component kit to suit.

Capacity (L)	90	125	150	170	200
Height (mm)	900	1050	1200	1500	1800
Diameter (mm)	470	470	470	470	470
A (mm)	155	155	155	155	155
B (mm)	185	185	185	185	185
C (mm)	480	480	585	585	585
D (mm)	n/a	n/a	n/a	n/a	1405
E (mm)	710	860	1010	1305	1605

Capacity (L)	90	125	150	170	200
Reheat from cold (minutes)	52	72	86	98	108
Reheat from 70% draw-off (minutes)	27	37	45	51	63
ERP Band	C	C	C	C	C
Immersion Rating (kw)	2 x 3	2 x 3	2 x 3	2 x 3	2 x 3
Standing Heat Loss (kwh/24hrs)	1.37	1.48	1.72	1.92	2.04

