


INDIRECT SLIM

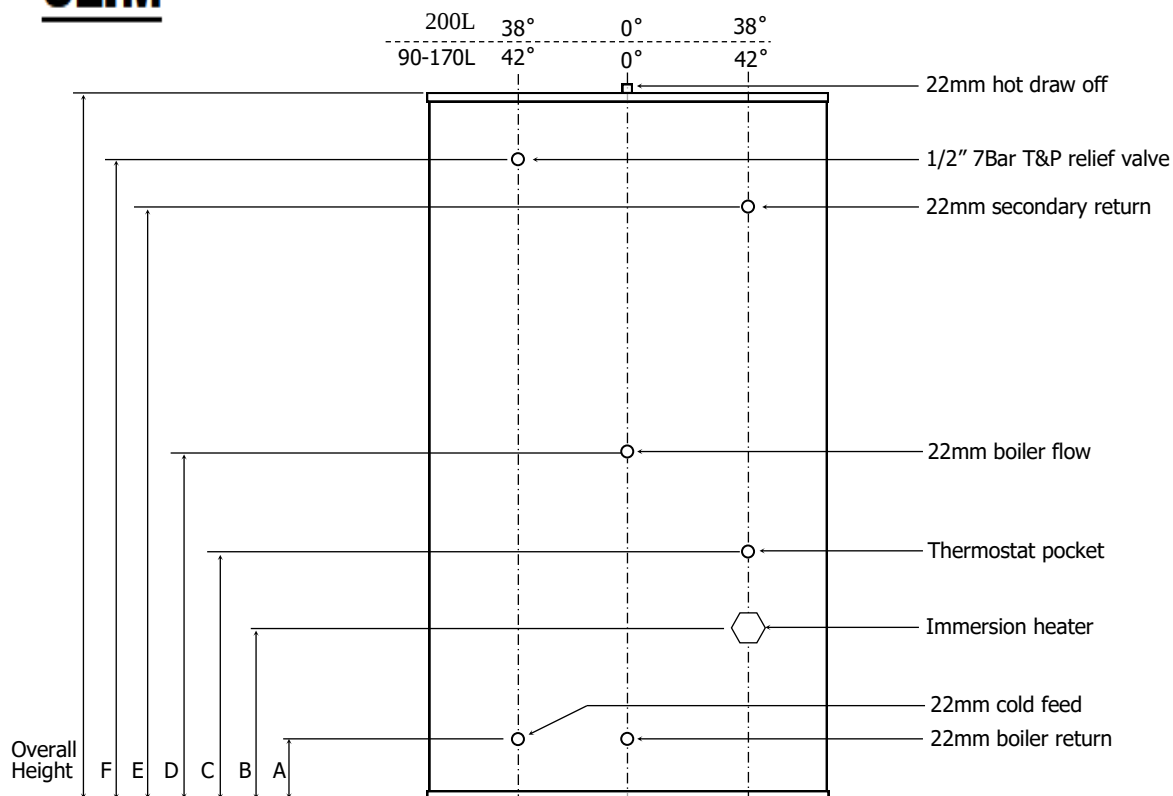

All unvented cylinders come with an unvented component kit to suit.

Capacity (L)	90	125	150	170	200
Height (mm)	900	1050	1200	1500	1800
Diameter (mm)	470	470	470	470	470
A (mm)	170	170	170	170	195
B (mm)	200	200	200	200	225
C (mm)	400	400	400	450	475
D (mm)	495	495	495	600	625
E (mm)	n/a	n/a	n/a	n/a	1405
F (mm)	710	860	1010	1305	1605

Capacity (L)	90	125	150	170	200
Reheat from cold (minutes)	26	36	37	36	33
Reheat from 70% draw-off (minutes)	18	25	6	25	24
ERP Band	C	C	C	C	C
Immersion Rating (kw)	3	3	3	3	3
Standing Heat Loss (kwh/24hrs)	1.37	1.48	1.72	1.92	2.04

