


Atlas Rotationally Moulded Plastic Tanks

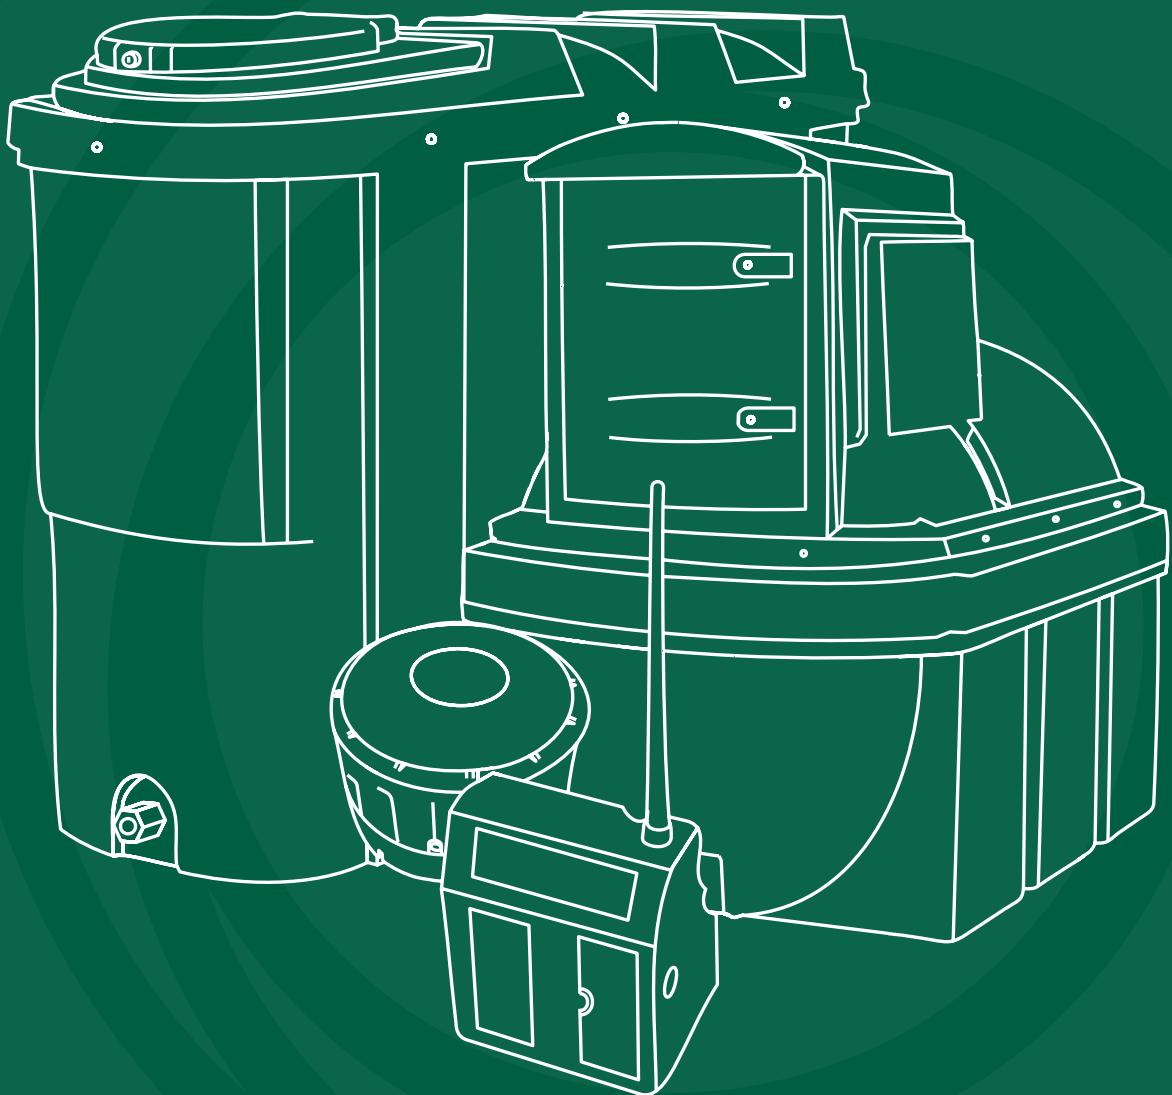

When you buy an Atlas Tank, you buy the best!

Whether you are replacing an old oil tank or installing a brand new heating system, you need to be sure you are using the best.

You want a strong, attractive tank at an affordable price. A tank that will give you security and many years of trouble-free service - a tank you can install and forget about - an Atlas Tank.

Choose from our wide range of designs. Every Atlas oil tank comes as standard with the installation kit, Watchman Sonic Advanced remote electronic gauge and SpillStop overfill prevention valve.

A complete proven range of tanks for today's market from Atlas.

Approved by the experts

Atlas tanks are manufactured to the highest standards; their attractive designs are all tested for quality and strength prior to despatch. You're on the right road with an Atlas tank because they are:

- Strong and light with built-in handgrips to make installation easy
- Well proven and respected design
- Carefully designed to prevent rainwater from entering
- UV stabilised so the colour will not fade

Important Information

Atlas Warranty

| Product | Warranty Period |
|-----------------------------------|-----------------|
| Bunded Oil Tanks | 10 years |
| Fuel Depot | 10 years |
| Fuel Depot Utility | 10 years |
| AdBlue® Tanks | 10 years |
| Potable & Non-Potable Water Tanks | 10 years |
| Waste Oil Storage | 10 years |
| Single Skinned Oil Tanks | 2 years |

Atlas Tanks' ancillary equipment has a 12-month warranty; dispensing hoses and nozzles have a 3-month warranty. Warranty may be void if the tank is improperly installed, misused, damaged, or repaired without Atlas Tanks' approval. Installation by a qualified OFTEC approved installer is required, following OFTEC codes of practice.

Before Installation

Prior to installing an oil storage tank, the installer should conduct a comprehensive risk assessment, prioritising the TI/133D Risk Assessment Forms provided by OFTEC. It's essential to be aware that regional requirements may differ. If you have any concerns, always contact your local OFTEC registered technician who can advise fully.

For installations at commercial, industrial, or institutional premises, a bunded tank is mandatory.

Table of Contents

| | |
|------------------------------|----|
| Important Information | 2 |
| Bunded Tanks Horizontal | 5 |
| Bunded Tanks Slimline | 5 |
| Bunded Tanks Vertical | 6 |
| Adblue® Tanks | 7 |
| Single Skinned Tanks | 8 |
| Fuel Depots | 10 |
| Fuel Depots Utility Range | 12 |
| Waste Oil Tanks | 14 |
| Coal Bunkers | 15 |
| Installation Kit Accessories | 15 |

Bunded Oil Tanks



10 Year
Warranty



Double
Construction



Meets Local
Regulations



Robust
Design



Quality
Material



1000BSLA



1300BHA

Atlas oil tanks are suitable for:
Grade A2 Gas Oil (BS2869), Grade
D Gas Oil (BS2869), Grade C1 /
C2 Kerosene (BS2869), Diesel
fuel (EN590), Paraffinic diesel fuel
(EN15940), Biofuel/HVO (EN15940).

Horizontal



1200LPBA 'NEW'

W 1200mm H 970mm
L 1800mm

Capacity: 1200 Litres
Brimful Capacity: 1222 Litres
Footprint: 1700 x 1180 mm
Weight: 130 kgs



1300BHA

W 1300mm H 1370mm
L 1800mm

Capacity: 1300 Litres
Brimful Capacity: 1383 Litres
Footprint: 1500 x 1240mm
Weight: 115 kgs



1900BHA

W 1540mm H 1470mm
L 2190mm

Capacity: 1900 Litres
Brimful Capacity: 2110 Litres
Footprint: 1830 x 1290mm
Weight: 150 kgs



2500BHA

W 1550mm H 1610mm
L 2250mm

Capacity: 2500 Litres
Brimful Capacity: 2549 Litres
Footprint: 1840 x 1480mm
Weight: 200 kgs

Slimline/Rectangular



650BSLA

W 630mm H 1380mm
L 1270mm

Capacity: 650 Litres
Brimful Capacity: 703 Litres
Footprint: 610 x 1180mm
Weight: 90 kgs



1000BSLA

W 650mm H 1360mm
L 1890mm

Capacity: 1000 Litres
Brimful Capacity: 1024
Litres
Footprint: 1860 x 610mm
Weight: 130 kgs



1225BRA

W 860mm H 1550mm
L 2100mm

Capacity: 1225 Litres
Brimful Capacity: 1248 Litres
Footprint: 2010 x 860mm
Weight: 140 kgs



1235BSLA

W 650mm H 1590mm
L 2000mm

Capacity: 1235 Litres
Brimful Capacity: 1238 Litres
Footprint: 1860 x 610mm
Weight: 150 kgs



1400BSLA

W 660mm H 1695mm
L 2140mm

Capacity: 1400 Litres
Brimful Capacity: 1443 Litres
Footprint: 2100 x 630mm
Weight: 165 kgs

Vertical



1300BVA
 D 1425mm H 1530mm
 Capacity: 1300 Litres
 Brimful Capacity: 1369 Litres
 Footprint: 1390mm
 Weight: 110 kgs



2300BVA
 D 1680mm H 1710mm
 Capacity: 2300 Litres
 Brimful Capacity: 2448 Litres
 Footprint: 1670mm
 Weight: 165 kgs



3500BVA
 D 2120mm H 1600mm
 Capacity: 3500 Litres
 Brimful Capacity: 3661 Litres
 Footprint: 2075mm
 Weight: 198 kgs

When you invest in Atlas you are buying strength, affordability and reliability - fully specified and approved - tanks you can trust.

Adblue® TANKS

Atlas manufacture AdBlue® dispensing units which come complete with the following as standard:



Inline Pump



Optional Inline Flowmeter



2" BSP Stainless Steel Dry Coupling



Robust Design



Automatic Nozzle



Hydrostatic Level Gauge



1300ABDA
 W 1300mm H 1745mm
 L 1800mm
 Capacity: 1300 Litres
 Brimful Capacity: 1383 Litres
 Footprint: 1600 x 1224mm
 Weight: 140 kgs



2500ABDA
 W 1520mm H 1975mm
 L 2235mm
 Capacity: 2500 Litres
 Brimful Capacity: 2549 Litres
 Footprint: 1900 x 1475mm
 Weight: 220 kgs



5000ABDA
 W 2090mm H 2310mm
 L 2570mm
 Capacity: 5000 Litres
 Brimful Capacity: 5002 Litres
 Footprint: 2570 x 2090mm
 Weight: 330 kgs

Important
 All Atlas Tanks need to be installed by a competent engineer in accordance with local regulations.

Single Skin Tanks



2 Year
Warranty



Corrosion
Resistant



Meets Local
Regulations



Robust
Design



Quality
Material



1150SLA

⌀ 700mm H 1450mm
L 1795mm

Capacity: 1150 Litres
Brimful Capacity: 1198 Litres
Footprint: 1695 x 640mm
Weight: 75 kgs



2500VA

⌀ 1600mm
H 1570mm

Capacity: 2500 Litres
Brimful Capacity: 2587 Litres
Footprint: 1550mm
Weight: 65 kgs



1300HA

W 1075mm H 1160mm
L 1620mm

Capacity: 1300 Litres
Brimful Capacity: 1383 Litres
Footprint: 1360 x 990mm
Weight: 55 kgs



2500HA

W 1330mm H 1400mm
L 2000mm

Capacity: 2500 Litres
Brimful Capacity: 2549 Litres
Footprint: 1650 x 1235mm
Weight: 90 kgs

Fuel Depots

Atlas Fuel Depots Standard specification supplied with integral 72lpm 230v pump (all models), 6m hose and auto nozzle, float level gauge, and 10 micron water and particulate filter.

Advanced specification has the addition of a digital flowmeter and digital level gauge. Pro specification includes digital flowmeter and our Watchman Access cloud-based fuel monitoring system. Available for 3500Ltrs + capacities. Customisation: Optional extras for 3500-9200L capacity tanks - faster 230v pump (100 lpm) and/ or an 8m hose reel. Please contact our office for further info.



10 Year Warranty



Accessible Level Fill Point



Auto Nozzle



6m Hose



Water & Particle Filter



9200FDA

1300FDA



1300FDA

W 1300mm H 1745mm
L 1800mm

Capacity: 1300 Litres
Brimful Capacity: 1383 Litres
Footprint: 1600 x 1224mm
Weight: 140 kgs

No Flowmeter Product Code:1010705
Flowmeter Product Code:1010723



2500FDA

W 1520mm H 1975mm
L 2235mm

Capacity: 2500 Litres
Brimful Capacity: 2549 Litres
Footprint: 1900 x 1475mm
Weight: 220 kgs

No Flowmeter Product Code:1010706
Flowmeter Product Code:1010724



5000FDA

W 2090mm H 2310mm
L 2570mm (inc. box)

Capacity: 5000 Litres
Brimful Capacity: 5002 Litres
Footprint: 2570 x 2090mm
Weight: 330 kgs

No Flowmeter Product Code:1010707
Flowmeter Product Code:1010725



9200FDA

W 2490mm H 2810mm
L 3100mm

Capacity: 9200 Litres
Brimful Capacity: 9211 Litres
Footprint: 2450 x 2780mm
Weight: 464 kgs (inc. POD)

Important

All mains powered Atlas Fuel Depots must be connected and maintained by a suitably qualified electrician in-accordance with local regulations.


Fuel Depots Utility Range

Atlas Utility Depots Standard specification supplied with integral 72lpm 230v pump (all models), 6m hose and auto nozzle, float level gauge, and 10 micron water and particulate filter.


Advanced specification has the addition of a digital flowmeter and digital level gauge.

Pro specification includes digital flowmeter and our Watchman Access cloud-based fuel monitoring system. Available for 3500Ltrs + capacities.

Customisation: Utility Depots are available with 12v (no extra cost) and 110v pump (extra cost). Optional extras for 3500-9200L capacity tanks - faster 230v pump (100 lpm) and/or an 8m hose reel. Please contact our office for further info.



Lockable Cabinet Door



Accessible Level Fill Point



Auto Nozzle



6m Hose



Water & Particle Filter



5000LPVFDA

1300VFDA



1300VFDA

⌀ 1425mm H 1835mm

Capacity: 1300 Litres
Brimful Capacity: 1369 Litres
Footprint: 1390mm
Weight: 130 kgs



2300VFDA

⌀ 1700mm H 1850mm

Capacity: 2300 Litres
Brimful Capacity: 2448 Litres
Footprint: 1650mm
Weight: 170 kgs



3500VFDA

⌀ 2100mm H 1905mm

Capacity: 3500 Litres
Brimful Capacity: 3661 Litres
Footprint: 2060 mm
Weight: 215 kgs



5000LPVFDA

⌀ 2480 H 2000

Capacity: 5000 Litres
Brimful Capacity: 5216 Litres
Footprint: 2430mm
Weight: 300 kgs



Watchman Access System

Watchman Access Fleet Management System enables you to take control of your assets and save costs using the latest cloud based technology.

Save costs, Simplify reporting and Take control of your assets.

- Never run out of fuel*
- Monitor your fuel levels remotely 24/7
- Take control
- Manage the fuel used by each vehicle / driver
- Secure your fuel
- Stop unauthorised access

*Customer's responsibility to set alarm function

Waste Oil Storage

Engineered specifically for the storage of waste oils and lubricants, every Atlas Bunded Waste Oil Tank is supplied complete with:

- Large Capacity Tundish
- Lockable Lid
- Removable Strainer
- Bund Alarm



| Product Code | Shape: | Brimful Capacity (litres) | Length (mm) | Width (mm) | Height (mm) |
|--------------|-------------|---------------------------|-------------|------------|-------------|
| 1200WOWA | Low profile | 1289L | 2000 | 650 | 1660 |
| 1550WOWA | Horizontal | 1480L | 2000 | 950 | 1500 |
| 1800WOWA | Horizontal | 1899L | 1970 | 1350 | 1510 |
| 2500WOWA | Horizontal | 2518L | 2300 | 1250 | 1450 |
| 1000WOWA | Slimline | 973L | 1890 | 645 | 1340 |
| 650WOWA | Slimline | 668L | 1300 | 630 | 1350 |
| 1235WOWA | Slimline | 1175L | 2140 | 660 | 1695 |
| 1400WOWA | Slimline | 1371L | 2000 | 1400 | 930 |
| 1230WOWA | Vertical | 1172L | - | 1250 | 1600 |
| 1340WOWA | Vertical | 1301L | - | 1410 | 1530 |
| 2350WOWA | Vertical | 2326L | - | 1700 | 1730 |
| 3500WOWA | Vertical | 3478L | - | 2120 | 1600 |
| 5000WOWA | Vertical | 5038L | - | 2120 | 2300 |
| 9200WOWA | Vertical | 8950L | - | 2800 | 2800 |

Coal Bunker



150 Kg Coal Bunker
 W 600mm H 770mm
 L 850mm
 Capacity: 150 kg



300 Kg Coal Bunker
 W 880mm H 970mm
 L 950mm
 Capacity: 300 kg



600 Kg Coal Bunker
 W 970mm H 1140mm
 L 1190mm
 Capacity: 600 kg

Accessories



Watchman

Atlas heating tanks* can be fitted with the Watchman Sonic Advanced** remote electronic gauge:

- 200 metre transmitter to receiver range
- Low power consumption
- Displays tank level
- Low level warning

*excludes Utility Range

**optional extra, not included as standard



Automatic Overfill Prevention Valve

Deliveries made into tanks equipped with the SpillStop ensure that the environment is protected if an attempt is made to overfill the tank*. This cleverly designed valve shuts off the fill point once oil reaches tank capacity. Suitable for any tank - single skin or bunded.

- Easily retro-fitted for environmental protection
- 2" BSP Connection
- Ideal for original fit by tank manufacturers
- BS EN 13616: 2004
- Type A TUV Nord Cert approved

*optional extra, not included as standard



ATLAS TANKS

180 Gilford Road Portadown Co Armagh
Northern Ireland
BT63 5LF

T: +44(0)333 121 6677

E: sales@atlastanks.co.uk

W: www.atlastanks.co.uk