

ST DISPENSERS WITH METER



EN. Diesel transfer station for non commercial use. Easy to install, versatile and compact these stations can be used to fill mobile tanks or interact with distribution units. Fitted with check valve, filter and nozzle support, they are also supplied with a 4 metre delivery hose (6 metres available on request) and can be integrated with a protective metal components box and water separating filter.

A complete range of accessories required for carrying out installation is also available.

ES. Estación de trasiego de gasolina. Fácil de instalar, versátil y compacto, estos sistemas pueden usarse para llenar tanques móviles o para interactuar con unidades de distribución. Está incluida la válvula de pie con filtro y porta pistola. Tubo de suministro de 4 metros de longitud (a petición unidad con 6 metros). Pueden integrarse con caja metálica de protección para componentes y con filtro separador de agua.

También disponibles todos los accesorios necesarios para completar la instalación.

PT. Estações de transferência de gasóleo para uso particular. Fáceis de instalar, versáteis e compactas, podem ser empregadas onde seja necessário acrescentar um grupo de distribuição a depósitos móveis ou enterrados. São equipadas com válvula no fundo com filtro e suporte para pistola. Comprimento do tubo de abastecimento: 4 metros (a pedido 6 metros). Podem ser integradas com uma caixinha de metal para proteger os componentes e com filtro separador de água.

Também há disponíveis todos os acessórios necessários para completar a instalação.

PERFORMANCE


- Flow rate up to 90 l/min
- Accuracy: +/- 1%
- AC and DC versions available
- Noise level below 75 dB

- Caudal hasta 90 l/min
- Precisión: +/- 1%
- Disponible en versiones CA y CC
- Nivel de ruido inferior a 75 dB

- Caudal até 90 l/min
- Precisão: +/- 1%
- Disponível na versão AC e DC
- Ruído inferior a 75 dB

PRODUCTS' RANGE WEIGHT AND PACKAGING

| Code without metal box | Weight | | Packaging | | |
|------------------------|--------|-----|-------------|----------------|---------|
| | kg | lbs | mm | inch | pcs/box |
| F00385P0A | 16 | 35 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| F00287P0A | 16 | 35 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| 000390000 | 21 | 46 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| 000392000 | 23 | 50 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| 000395000 | 23 | 50 | 480x370x265 | 18,9x14,6x10,4 | 1 |
| 000397000 | 20 | 44 | 480x370x265 | 18,9x14,6x10,4 | 1 |
| 000256000 | 10 | 22 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| F0023500B | 13 | 29 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| F0023600B | 13 | 29 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| F0023300B | 14 | 31 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| F0023400B | 14 | 31 | 357x357x275 | 14,1x14,1x10,8 | 1 |
| F0024000A | 24 | 53 | 480x370x265 | 18,9x14,6x10,4 | 1 |
| F0024100A | 24 | 53 | 480x370x265 | 18,9x14,6x10,4 | 1 |
| F00340070 | 17 | 37 | 357x357x275 | 14,1x14,1x10,8 | 1 |

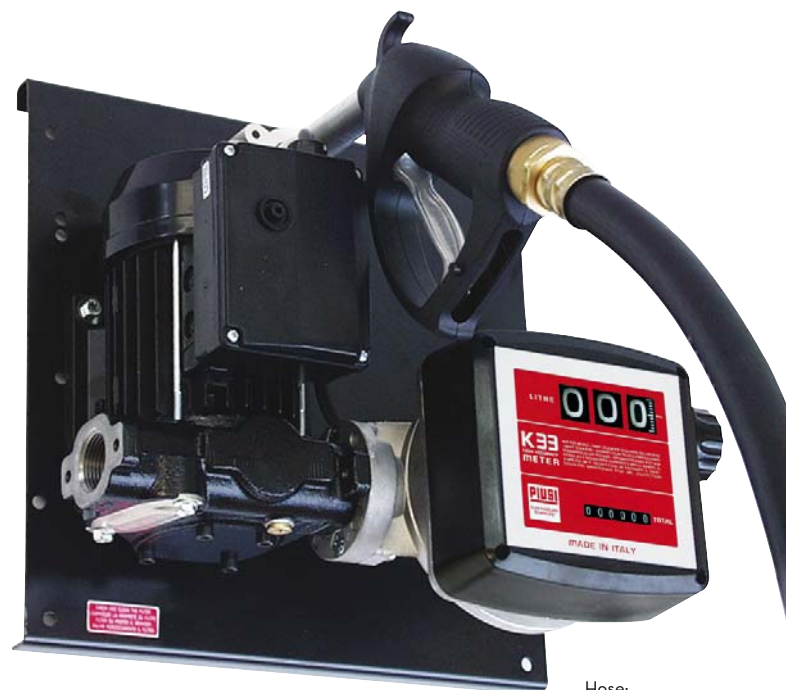

Hose:
- length 4 m
- Ø 1"

Flow-rate
up to
90 l/min
(up to 24 gpm)

Accuracy
+/-
1%



PIUSI
®



ST Panther 56 K33



Metal box (565x308x582)
Code: 00933100A

ON REQUEST



ON REQUEST



PRODUCTS' RANGE TECHNICAL DATA

| Code without metal box | Code with metal box | Description | Fluids type | Flow-rate | | Voltage | | | Meter mod. | Nozzle type | Filter H ₂ O filter | Inlet BSP |
|------------------------|---------------------|-----------------------------------|-------------|-----------|-----|-----------------|------------|-----------|------------|-------------|--------------------------------|-----------|
| | | | | l/min | gpm | AC V/Hz DC Volt | Power Watt | Amp. max. | | | | |
| F00385POA | - | ST Panther 56 K33 | D | 56 | 15 | 230/50 | 600 | 3 | K33 | Man. | NO | 3/4" |
| F00287POA | F00365POA | ST Panther 56 K33 A60 | D | 56 | 15 | 230/50 | 600 | 3 | K33 | Aut. | NO | 3/4" |
| 000390000 | - | ST E 80 K33 | D | 80 | 21 | 230/50 | 700 | 3,5 | K33 | Man. | NO | 1" |
| 000392000 | 00036700B | ST E 80 K33 A80 | D | 75 | 20 | 230/50 | 700 | 3,5 | K33 | Aut. | NO | 1" |
| 000395000 | - | ST E 120 K33 | D | 90 | 24 | 230/50 | 1150 | 5,7 | K33 | Man. | NO | 1" |
| 000397000 | 00036900B | ST E 120 K33 A120 | D | 90 | 24 | 230/50 | 1150 | 5,7 | K33 | Aut. | NO | 1" |
| 000256000 | - | ST Viscomat 70 K33 (Rapsol) | B | 30 | 8 | 230/50 | 950 | 4,6 | K33 | Man. | NO | 1" |
| - | F00265020 | ST Viscomat 90 K600 (Rapsol) | B | 65 | 17 | 230/50 | 1600 | 7,8 | K33 | Man. | NO | 1" |
| F0023500B | - | ST ByPass 3000/12V K33 | D | 40 | 10 | 12 | 260 | 22 | K33 | Man. | NO | 3/4" |
| F0023600B | - | ST ByPass 3000 inline 24V K33 | D | 40 | 10 | 24 | 300 | 12 | K33 | Man. | NO | 3/4" |
| F0023300B | - | ST ByPass 3000/12V K33 A60 | D | 35 | 9 | 12 | 260 | 22 | K33 | Aut. | NO | 3/4" |
| F0023400B | - | ST ByPass 3000 inline 24V K33 A60 | D | 35 | 9 | 24 | 300 | 12 | K33 | Aut. | NO | 3/4" |
| F0024000A | - | ST Bipump 12V K33 Self 3000 | D | 80 | 21 | 12 | 530 | 44 | K33 | Man. | NO | 1" |
| F0024100A | - | ST Bipump 24V K33 Self 3000 | D | 80 | 21 | 24 | 540 | 22,5 | K33 | Man. | NO | 1" |
| - | F0039900A | ST Bipump 12V K33 A120 (Rapsol) | B | 80 | 21 | 12 | 530 | 44 | K33 | Aut. | NO | 1" |
| F00340070 | - | ST Panther 12V K33 A60 | D | 56 | 15 | 12 | 420 | 35 | K33 | Aut. | NO | 3/4" |

The units can also be supplied for operating under different voltages and without meter.

DISPENSERS

PUMPS

METERS

NOZZLE METERS

NOZZLE

SPECIAL EQUIPMENTS

FLUID MONITORING

ACCESSORIES

FILTERING