


**PART NUMBER:**

**TM4790**

## Tankmaster

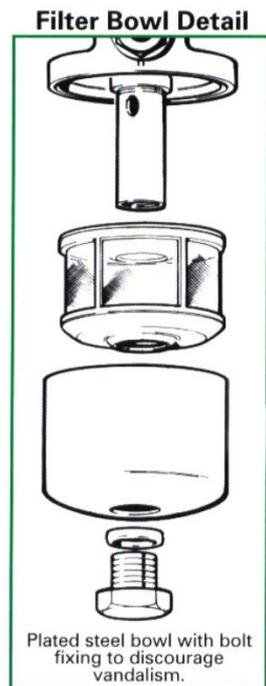

### Four-in-one Level Gauge

1. Control Valve to turn on/off oil supply.
2. Pull to Read Valve/Sight Tube allows inspection of tank contents level.
3. Integral Filter to ensure only clean oil is allowed to pass from the tank.
4. Self-Closing Hand Wheel isolates oil supply in case of fire near the tank.

You can purchase the Tankmaster Body only or any height of Sight Tube only.

Sight Gauge tank extension adaptors are available for tanks where the outlet is recessed and where a sight gauge is to be fitted.

## Specifications

### Dimensions:

Body Assembly – 15.5cm x 8cm  
Sight Tube Assembly – As Required  
Total Weight (4' 0") – 1.0 kg (approx.)

### Materials:

Valve Body	Mazac
Pull to Read Valve	Brass
Springs	Stainless Steel
Tank Union	Aluminium
Tank Union Piston	Brass
Sight Tube	PVC
Sight Tube Tail	Aluminium
Compression Olive	Brass
Compression Nut	Brass
Filter Element	Nylon 52 Microns
Filter Bowl	Bright Zinc-Plated Mild Steel
Filter Bowl Stem	Mild Steel
Filter Bowl Bolt	Bright Zinc-Plated Mild Steel
Filter Bowl Bolt Seal	Nylon

### Application:

Use for fitting to steel or plastic oil heating storage tanks. (Note: A range of adaptors are available for plastic tanks.)

- **Oil Take Off** – Either right hand or left hand.
- **Gauge Length** – To suit tank depth.
- **Sight Tube** – Clear PVC.
- **Sight Tube Shield** – Rigid PVC. (Aluminium by request)
- **Sight Tube Assembly** – Detachable.
- **Oil Level Valve** – Pull to Read (Self Closing).
- **Fire Valve** – Automatic over temperature shut off.
- **Oil Line Outlet** – 10mm copper compression.
- **Oil Flow Rate** – Up to 36 litres per hour (8 gallons per hour).
- **Tank Connection** – ½" BSP.
- **Filter** – Replaceable when boiler is serviced. NOT washable.

Designed to comply with BS799 Pt 2.

Service kits available.

