




Specification Data Sheet | Model: LLWOB1200

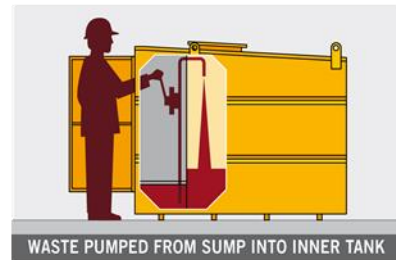

ENVIROBULKA 5300 Ltr Low Level Waste Oil Bank

110% bunded waste oil and hydro-carbon storage tank to comply with PPG2 (Pollution Prevention Guidelines) Regulations

In addition to the standard EnviroBulka benefits, this Deluxe range features:

-  Low level oil collection sump to provide safer, more comfortable working height and help prevent backache.
-  Oil filters and other smaller equipment can be easily drained by placing on the mesh floor above the collection sump.

OPTIONAL PUMPS

VODWOB – Electric Pump for transfer of waste oil from sump to tank, c/w push-button switch & auto switch-off after 5 min run time. 110 or 240V

VODWOB-H. Manual Semi Rotary Hand Pump for transfer of waste oil from sump to tank.

SPECIFICATION			
Standard Tank Fittings: 2" Suction Point : 2" Vent : Sight Glass : Contents Gauge: 2x Spare 1¼" Ports for additional equipment : Bund Drain Pipe : Bund Alarm			
Capacity (Brim Full) Litres:	5300	Weight Unladen (kg):	1430
Capacity (Brim Full) Gallons:	1200	Weight Laden (kg):	5885
Dimensions Length (mm):	3000	Design Standards:	PPG2 & BS799
Dimensions Width (mm):	1150		
Dimensions Height (mm)	2475		
Cabinet Dimensions (mm) Opening Size:	W850 x H1700 x D580		
Notes			

Revision Date: 26/06/2015

