





## ULTRASTEEL HORIZONTAL

## UNVENTED STAINLESS STEEL CYLINDERS

## **Key Features:**

- ▶ Good flow rates for fast filling of baths, ideal for multiple bathrooms
- Well insulated economical to run with low heat loss
- Low reheat times for fast availability of hot water
- Duplex stainless steel basic vessel with superior corrosion resistance and aesthetically pleasing outer
- ▶ 25-Year guarantee on inner vessel, 2 years on parts\*


<sup>\*</sup> See installation instructions for full terms and conditions



Horizontal cylinders have been developed as a practical solution for locations where height restrictions apply, such as lofts; they enable installers to fit unvented cylinders in properties where otherwise it would not physically be possible.

With indirect models available in capacities from 180 to 300 litres, their manufactured to the same high build quality that have made the Kingspan Albion range famous.



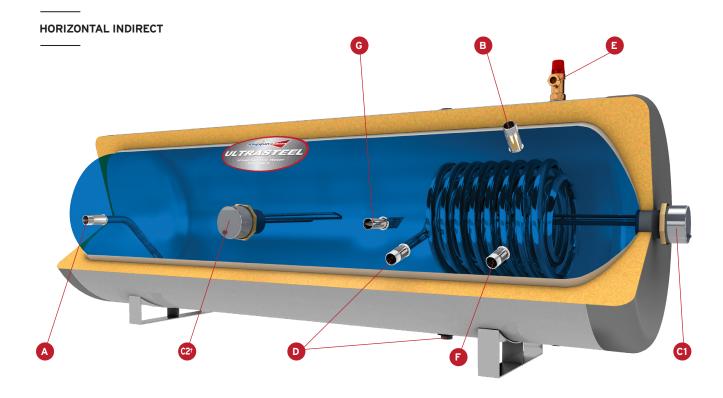

## **CONNECTIONS:**

- A 22mm Cold feed with deflector in bottom of cylinder
- B 22m Hot water outlet
- C1 Immersion heater\*
- **C2** Secondary immersion heater\* 250 & 300 litre cylinders only
- D 22mm Boiler coil connections
- E 1/2" Temperature relief valve connection (valve factory-fitted to all cylinders)
- F 22mm Secondary return for cylinders with a capacity of 210 litres and above only
- **G** Dry stat pocket boiler

						Boss centre from right hand of cylinder							Immersion	ErP	
	ylinder type and Code	Capacity (Litres)	Length (mm)	Height with cradles (mm)	Dia. (mm)	A (mm)	B (mm)	C2 <sup>†</sup> (mm)	D (mm)	E (mm)	F (mm)	G (mm)	Heaters Fitted (3kW)	Rating	Standing Loss, (W)
INDIRECT	AUIH180	180	1261	741	550	1024	208	798†	483	483	248	483	1†	D	41
	AUIH210	210	1449	741	550	1212	208	898†	483	483	248	483	1†	D	44
	AUIH250	250	1699	741	550	1462	208	898	483	483	248	483	2	D	47
	AUIH300	300	2012	741	550	1775	208	898	483	483	248	483	2	D	68

† Note: 180L & 210L Cylinders only fitted with 1-½" BSP boss; an optional additional immersion heater sold separately. Immersion heater code: IMHTRSS

Contact us today for more information:

T: 0345 260 0258 hotwater@kingspan.com

<sup>\*</sup> Not to be used as the primary heat source