



Paxton

# AGRICULTURAL PRODUCTS

**Suppliers of livestock handling  
equipment for over 25 years**



# KEY

Look out for these pictures to indicate which products are suitable for which animal. They are on the top left of every product page and relate to all the products on that page unless specifically stated in the text.



## BEEF CATTLE

For our largest and most robust products



## DAIRY CATTLE

Will find most of the PAXTON range suitable



## HORSES & PONIES

Products that work well in the equine world



## SHEEP & GOATS

Products for smaller livestock

# CONTENTS

## DRINKING TROUGHS

Circular	4 – 8
Rectangular	9 – 20
Wall & Floor Mounted	21 – 24

## SHEEP DIPS

Sheep Dips	39 – 41
------------	---------

## OTHER PRODUCTS

Perfo Ground Stabilisation Matting	59
------------------------------------	----

## FEED TROUGHS

Floor Standing	25 – 29
Hanging	30 – 31

## WATER TANKS

Above & Below Ground Tanks	43 – 50
Slim line Tanks	51 – 52

## APPENDIX

Delivery Times	I
FAQs	II
Quality	III
Other Information	IV

## FOOTBATHS

Footbaths	33 – 36
Equestrian Water Trays	36
Hoof Spreading Footbaths	37


## DAIRY HYGIENE

Rectangular Wash Troughs	53 – 54
Trough Style Wash Troughs	55 – 57
Churns	58



# 2046L DRINKING TROUGHS

2046 litres



Large capacity trough for large herds in open areas

Smooth line interior for ease of cleaning

Low drinking height so animals can comfortably reach the water

Single drainage outlet (outlet 1)

Integral Service box and removable lid (ref AT cover)

Part 2 compliant  $\frac{3}{4}$ " ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

	Dimensions Dia. mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT1</b>	2210 x 806H	720 mm	2046	1½"	Yes	Removable

**AT1** circular drinking trough



# 909L DRINKING TROUGHS

909 litres



Large capacity trough

Smooth line interior for ease of cleaning

Single drainage outlet (outlet 1)

Integral Service box and removable lid (ref AT cover)

Part 2 compliant 1/2" ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

**AT6** circular drinking trough

	Dimensions Dia. mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT6</b>	1560 x 855H	785 mm	909	1 1/2"	Yes	Removable




682L

# DRINKING TROUGHS



682 litres



**AT15** circular drinking troughs

Low drinking height so animals can comfortably easily reach the water

Smooth line interior for ease of cleaning

Single drainage outlet (outlet 1)

Integral Service box and removable lid (ref AT cover)

Part 2 compliant 1/2" ballcock


Manufactured from UV stabilised and frost resistant to -40 °C MDPE

	Dimensions Dia. mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT15</b>	1450 x 670H	619 mm	682	1 1/2"	Yes	Removable



# 1075L DRINKING TROUGHS

1075 litres



Recommended for areas where a constant water supply is not available

Supplied without a filling mechanism

Smooth line interiors for ease of cleaning

Low drinking height so Cattle can comfortably reach the water

Single drainage outlet (outlet 1)

Manufactured from UV stabilised and frost resistant to -40 °C MDPE


**AT5** circular drinking troughs

	Dimensions Dia. mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT5</b>	1650 x 610H	620 mm	1075	1½"	No	N/A



# 675L DRINKING TROUGHS

675 litres



Recommended for areas where a constant water supply is not available

Supplied without a filling mechanism

Smooth line interiors for ease of cleaning

Low drinking height so Beef Cattle can comfortably reach the water

Single drainage outlet (outlet 1)

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

**AT8** circular drinking troughs

	Dimensions Dia. mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT8</b>	1330 x 620H	610 mm	675	1½"	No	N/A





75L

# DRINKING TROUGHS



75 litres



**WT75 R** rectangular drinking troughs

Movable ballcock support allows choice of centre fill or end fill set up

Easy to clean, tough, double skin design

Drainage outlet (50mm) and plug included as standard

Part 2 compliant 1/2" ballcock

Bolt down points included as standard

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

UV stabilised

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>WT75R</b>	1190L x 430W x 340.5H	235 mm	75	50 mm	Yes	Removable



120L

# DRINKING TROUGHS

120 litres



**WT120 R** rectangular drinking troughs

Movable ballcock support allows choice of centre fill or end fill set up

Easy to clean, tough, double skin design

Drainage outlet (50mm) and plug included as standard

Part 2 compliant 1/2" ballcock

Bolt down points included as standard

Manufactured from UV stabilised and frost resistant to -40 °C MDPE


UV stabilised

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>WT120R</b>	1190L x 430W x 456H	355 mm	120	50 mm	Yes	Removable



# 1136L DRINKING TROUGHS

1136 litres



Free standing centre fill trough suitable for dairy cows and beef cattle
Ribbed walls for strength
Two drainage outlets (outlet 1)
Integral Service box and removable lid (ref ATL2 cover)
Part 2 compliant 1/2" ballcock
Manufactured from UV stabilised and frost resistant to -40 °C MDPE

**AT22** rectangular drinking troughs


	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT22</b>	2000L x 1200W x 795H	695 mm	1136	1 1/2" x 2	Yes	Removable



# 545L

# DRINKING TROUGHS

545 litres



**AT19** rectangular drinking troughs

Longer format centre fill trough

Includes two drainage outlets as standard (outlet 1)

Suitable for use indoors or in fields

Integral Service box and removable lid (ref ATL2 cover)

Part 2 compliant 1/2" ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT19</b>	2600L x 610W x 534H	460 mm	545	1 1/2" x 2	Yes	Removable



272L

## DRINKING TROUGHS

272 litres



Centre fill trough which will fit between two fields, yards or pens

272 litre capacity

Integral Service box and removable lid (ref ATL2 cover)

Part 2 compliant 1/2" ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE


**AT21** rectangular drinking troughs

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT21</b>	1270L x 650W x 605H	510 mm	272	No	Yes	Removable



# 410L DRINKING TROUGHS

410 litres



Centre fill trough which will fit between two fields, yards or pens

410 litre capacity

Integral Service box and removable lid (ref ATL2 cover)

Part 2 compliant 1/2" ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

**AT18** rectangular drinking troughs

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT18</b>	1520L x 720W x 635H	535 mm	410	No	Yes	Removable



# 318L DRINKING TROUGHS

318 litres



Popular end fill model
External rim and moulded in ribs for extra strength and stability
Single drainage outlet (outlet 1)
Integral Service box and removable lid (ref AT Cover)
Part 2 compliant 1/2" ballcock
Manufactured from UV stabilised and frost resistant to -40 °C MDPE


**AT2** rectangular drinking troughs

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT2</b>	2019L x 559W x 559H	455 mm	318	1 1/2"	Yes	Removable



# 182L DRINKING TROUGHS

182 litres



**AT3** rectangular drinking troughs

Popular end fill model

External rim and moulded in ribs for extra strength and stability

Single drainage outlet (outlet 1)

Integral Service box and removable lid (ref AT Cover)

Part 2 compliant 1/2" ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT3</b>	1353L x 559W x 535H	455 mm	182	1 1/2"	Yes	Removable





227L

# DRINKING TROUGHS

227 litres



End fill design

One piece construction and smooth 'easy clean' surface

Single drainage outlet (outlet 1)

Integral Service box and removable lid (ref ATL2 cover)

Part 2 compliant 1/2" ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

**AT24** rectangular drinking troughs

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT24</b>	1400L x 560W x 500H	400 mm	227	1 1/2"	Yes	Removable



114L

# DRINKING TROUGHS

114 litres



Centre fill design

One piece construction and smooth 'easy clean' surface

Integral Service box and removable lid (ref ATL2 cover)

Part 2 compliant 1/2" ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

**AT16** rectangular drinking troughs

	Dimensions Dia. mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT16</b>	1000L x 430W x 455H	380 mm	114	No	Yes	Removable



77L

# DRINKING TROUGHS

77 litres



Centre fill design

One piece construction and smooth 'easy clean' surface

Integral Service box and removable lid (ref ATL2 cover)

Part 2 compliant 1/2" ballcock

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

	Dimensions Dia. mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT17</b>	1000L x 430W x 355H	280 mm	77	No	Yes	Removable


**AT17** rectangular drinking troughs



6.8L

## DRINKING BOWLS

6.8 litres



Compact design with built in mounts for easy wall fixing

Ideal for single animal use in loose boxes or stables

Large easy drain screw cap for fast emptying

Includes removable service box cover for easy access to ballcock

Left and right Ballock fixing

Includes Part 2 ballcock compliant with Water Regulations

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT25</b>	410L x 300W x 344H	Wall Mounted	6.8	46mm	Yes	Removable


**AT25** drinking bowls



17L

# DRINKING BOWLS

17 litres



**AT23** round end drinking bowls

Corner bowl
Wall mounted
Built in mounts for easy wall fixing
Includes removable service box cover for easy access to ballcock
Includes Part 2 ballcock compliant with Water Regulations
Large easy drain screw cap for fast emptying

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT23</b>	580L x 430W x 270H	Wall mounted	17	46mm	Yes	Removable




27L

# DRINKING BOWLS



27 litres



**AT11** round end drinking bowls

Large capacity bowl

Ideal for single animal use in loose boxes or stables

19 mm outlet with 25 mm grommet for drainage

Includes removable service box cover for easy access to ballcock

Includes Part 2 ballcock compliant with Water Regulations


	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT11</b>	552L x 457W x 254H	Wall Mounted	27	19 mm	Yes	Removable



45L

# DRINKING BOWLS

45 litres



Floor standing trough

Ideal for single animal use in loose boxes or stables

Includes removable service box cover for easy access to ballcock

Includes Part 2 ballcock compliant with Water Regulations

**AT20** round end drinking bowls

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>AT20</b>	700L x 550W x 410H	235 mm	45	No	Yes	Removable



19L

# DRINKING BOWLS

19 litres



Easy to clean, strong, double skin construction

70 mm drainage bung for rapid emptying in under 38 seconds

4 integral robust wall fixing points

Left and right ballcock fixing

Part 2 compliant ½" ballcock

Large removable service box cover for easy access to the ballcock

Manufactured from frost resistant, UV stabilised MDPE

	Dimensions mm	Drinking Height	Capacity Litres	Drainage Outlet	Ballcock & Fitting	Service Box Cover
<b>WT19</b>	500L x 403W x 308H	Wall mounted	19	70 mm	Yes	Removable

**WT19** rectangular drinking bowls





15L

## FEED TROUGHS



15 litres



**LF1** floor standing feed troughs

Hard wearing feed trough

Simple, stable and stackable design

Suitable for most livestock

Robust one-piece easy clean moulding

Hand holes for ease of lifting

	Dimensions mm	Capacity Litres
<b>LF1</b>	1000L x 298W x 133H	15



33L

# FEED TROUGHS



33 litres



**LF2** floor standing feed troughs

Hard wearing feed trough

Simple, stable and stackable design

Suitable for most livestock

Robust one-piece easy clean moulding

Hand holes for ease of lifting

	Dimensions mm	Capacity Litres
<b>LF2</b>	2000L x 298W x 133H	33



46L

## FEED TROUGHS



46 litres



**LF3** floor standing feed troughs

Hard wearing feed trough

Simple, stable and stackable design

Suitable for most livestock

Robust one-piece easy clean moulding

Hand holes for ease of lifting

	Dimensions mm	Capacity Litres
<b>LF3</b>	3000L x 298W x 133H	46




80L

# FEED TROUGHS



80 litres



**LF5** floor standing feed troughs

Larger (80 litre) capacity unit

Strong and durable, one piece, moulding

Easy to clean, safe and stable in use

Stacks when not in use

	Dimensions mm	Capacity Litres
<b>LF5</b>	2000L x 460W x 230H	80




18L

# FEED TROUGHS



18 litres



**HR40A** floor standing tyre feeder trough

Fits inside a 15 inch tyre (not included)

Lightweight and easy to handle

Smooth hygienic and easily cleaned

Ideal for mineral licks

	Dimensions Dia. mm	Capacity Litres
<b>HR40A</b>	425 x 178H	18




28L

# FEED TROUGHS



28 litres



**LF6** hanging feed troughs

Versatile hanging trough

Strong and durable one piece moulding

Smooth easy clean surface

Built in lip for hanging on bars and rails

	Dimensions mm	Capacity Litres
<b>LF6</b>	500L x 413W x 305H	28



73L

## FEED TROUGHS



73 litres



**LF4** hanging feed troughs

Versatile hanging trough

Strong and durable one piece moulding

Smooth easy clean surface

Comes complete with galvanised hanging brackets and fixings

	Dimensions Dia. mm	Capacity Litres
<b>LF4</b>	1515L x 380W x 305H	73



[www.paxtonagri.co.uk](http://www.paxtonagri.co.uk)






86L

# FOOTBATHS



86 litres



**FB2** walk through footbath

Traditional style footbath commonly used with formalin

Ribbed base for safe, quick penetration of footrot treatments

Resistant to all footrot chemicals

Easy to clean and handle

Tough one piece moulds

Can be linked together length wise for longer runs

	Dimensions mm	Capacity Litres
<b>FB2</b>	3000L x 470W x 180H	86



180L

# FOOTBATHS



180 litres



**FB1** walk through footbath

Anti-slip base for safe, quick penetration of footrot treatments

Safe, large radius corners with smooth edges

Resistant to all footrot chemicals

Easy to clean and handle

Tough one piece moulds

	Dimensions mm	Capacity Litres
<b>FB1</b>	2000L x 850W x 150H	180



309L

# FOOTBATHS



309 litres



**FB4** walk through footbath

Anti-slip base for safe, quick penetration of footrot treatments

Safe, large radius corners with smooth edges

Resistant to all footrot chemicals

Easy to clean and handle

Tough one piece moulds

	Dimensions mm	Capacity Litres
<b>FB4</b>	3050L x 915W x 150H	309



700L

# FOOTBATHS

700 litres



**FB5 / WT3** footbath/equestrian tray

Anti-slip base for safe, quick penetration of footrot treatments

Safe, large radius corners with smooth edges

Resistant to all footrot chemicals

Easy to clean and handle

Tough one piece moulds

FB5 can also be used as a water tray (WT3)

	Dimensions mm	Capacity Litres
<b>FB5 / WT3</b>	3150L x 1635W x 166H	700




541L

# FOOTBATHS



541 litres



**FB3** hoof spreading footbath

Specially designed floor spreads the hoof for effective footrot treatment

Suitable for large animals

Safe, large radius corners with smooth edges

Resistant to all footrot chemicals

Easy to clean and handle

Tough one piece mould

	Dimensions mm	Capacity Litres
<b>FB3</b>	3000L x 1100W x 240H	541




[www.paxtonagri.co.uk](http://www.paxtonagri.co.uk)



1818L

## SHEEP DIPS

1818 litres



Large (1818 litre) capacity

Integral Left Hand entry slide

Drain back exit steps

Anti splash rim reduces spillage

Smooth finish to reduce injury

Hard wearing MDPE

Resistant to dipping solutions

	Dimensions mm	Capacity Litres
<b>SD400LH</b>	2692L x 2060W x 1283H	1818

**SD400LH** round sheep dip



1250L

# SHEEP DIPS

1250 litres



Integral Right Hand entry slide

Anti splash rim reduces spillage

Drain back exit steps

Smooth finish to reduce injury

Hard wearing MDPE

Resistant to dipping solutions

**SD275RH** round sheep dip

	Dimensions mm	Capacity Litres
<b>SD275RH</b>	2300L x 1800W x 1240H	1250





1136L

# SHEEP DIPS

1136 litres



**SD250** rectangular sheep dip

Drain back exit steps

Anti splash rim reduces spillage

Smooth finish to reduce injury

Hard wearing MDPE

Resistant to dipping solutions

	Dimensions mm	Capacity Litres
<b>SD250</b>	2915L x 915W x 1220H	1136




[www.paxtonagri.co.uk](http://www.paxtonagri.co.uk)

# 10000L

# WATER TANKS

10000 litres



**CT2200 JA** above ground storage tank

Suitable for Potable Water (100% food grade material used throughout)
Hard wearing, one piece, stress free moulding
Manufactured from UV stabilised and frost resistant to -40 °C MDPE
Smooth hygienic surfaces
Built in lifting lugs and large Screw in lid
Flat area for fitting outlets and connections
Supplied with 2" BSP Outlet. Optional Byelaw 30 kit available
WRAS approved

	Dimensions Dia. mm	Manhole Internal	Capacity Litres	Vented Insert Internal
<b>CT2200 JA</b>	2515 x 2635H	546 mm	10000	127 mm

# 4546L

# WATER TANKS

4546 litres



Suitable for Potable Water (100% food grade material used throughout)

Hard wearing, one piece, stress free moulding

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

Smooth hygienic surfaces

Built in lifting lugs and large Screw in lid

Flat area for fitting outlets and connections

Supplied with 2" BSP Outlet. Optional Byelaw 30 kit available

WRAS approved

**CT1000 JA** above ground storage tank

	Dimensions Dia. mm	Manhole Internal	Capacity Litres	Vented Insert Internal
<b>CT1000 JA</b>	1850 x 2305H	546 mm	4546	127 mm

2728 litres



**CT0600 JA** above ground storage tank

2728L

## WATER TANKS

Suitable for Potable Water (100% food grade material used throughout)

Hard wearing, one piece, stress free moulding

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

Smooth hygienic surfaces

Built in lifting lugs and large Screw in lid

Flat area for fitting outlets and connections

Supplied with 2" BSP Outlet. Optional Byelaw 30 kit available


WRAS approved

	Dimensions Dia. mm	Manhole Internal	Capacity Litres	Vented Insert Internal
<b>CT0600 JA</b>	1850 x 1555H	546 mm	2728	127 mm

# 909L

# WATER TANKS

909 litres



Suitable for Potable Water (100% food grade material used throughout)

Hard wearing, one piece, stress free moulding

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

Smooth hygienic surfaces

Built in lifting lugs and large Screw in lid

Flat area for fitting outlets and connections

Supplied with 2" BSP Outlet. Optional Byelaw 30 kit available

WRAS approved


**CT0200 JA** above ground storage tank

	Dimensions Dia. mm	Manhole Internal	Capacity Litres	Vented Insert Internal
<b>CT0200 JA</b>	1308 x 1060H	546 mm	909	127 mm

# 10000L

# WATER TANKS

10000 litres




**CT2200 JB** below ground storage tank

Suitable for Potable Water (100% food grade material used throughout)
Hard wearing, one piece, stress free moulding
Manufactured from UV stabilised and frost resistant to -40 °C MDPE
Smooth hygienic surfaces
Built in lifting lugs and large Screw in lid
Flat area for fitting outlets and connections
WRAS approved

	Dimensions Dia. mm	Manhole Internal	Capacity Litres	Vented Insert Internal
<b>CT2200 JB</b>	2515 x 2635H	546 mm	10000	127 mm

4546 litres



**CT1000 JB** below ground storage tank

4546L

## WATER TANKS

Suitable for Potable Water (100% food grade material used throughout)

Hard wearing, one piece, stress free moulding

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

Smooth hygienic surfaces

Built in lifting lugs and large Screw in lid

Flat area for fitting outlets and connections

WRAS approved


	Dimensions Dia. mm	Manhole Internal	Capacity Litres	Vented Insert Internal
<b>CT1000 JB</b>	1850 x 2305H	546 mm	4546	127 mm



# 2728L

# WATER TANKS

2728 litres



Suitable for Potable Water (100% food grade material used throughout)

Hard wearing, one piece, stress free moulding

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

Smooth hygienic surfaces

Built in lifting lugs and large Screw in lid

Flat area for fitting outlets and connections

WRAS approved

	Dimensions Dia. mm	Manhole Internal	Capacity Litres	Vented Insert Internal
<b>CT0600 JB</b>	1850 x 1555H	546 mm	2728	127 mm

**CT0600 JB** below ground storage tank

# 909L

# WATER TANKS

909 litres



Suitable for Potable Water (100% food grade material used throughout)

Hard wearing, one piece, stress free moulding

Manufactured from UV stabilised and frost resistant to -40 °C MDPE

Smooth hygienic surfaces

Built in lifting lugs and large Screw in lid

Flat area for fitting outlets and connections

WRAS approved

**CT0200 JB** below ground storage tank

	Dimensions Dia. mm	Manhole Internal	Capacity Litres	Vented Insert Internal
<b>CT0200 JB</b>	1308 x 1060H	546 mm	909	127 mm

250L

## WATER TANKS



250 litres

**ST250V** slim line tank

Slim, space saving design

Fits through doorways & into narrow spaces

Large lid access for submersible pump

Tough and durable


Range of Colours available

	Dimensions mm	Weight Kg	Capacity Litres
<b>ST250V</b>	1190L x 330W x 830H	20	250

250L

# WATER TANKS

250 litres

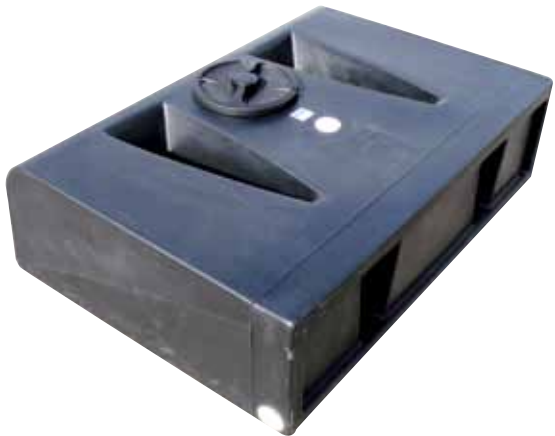

Slim, space saving design

Fits through doorways & into narrow spaces

Large lid access for submersible pump

Tough and durable

Range of Colours available

**ST250H** slim line tanks


	Dimensions mm	Weight Kg	Capacity Litres
<b>ST250</b>	1190L x 830W x 330H	20	250



120L

**DAIRY HYGIENE**

120 litres



Rectangular Self Standing Wash Trough with lid

120 litre capacity

Double skinned for superior heat retention

Suitable for holding circulation wash water

Calibrated internal markings

One piece construction and smooth 'easy clean' surface

38mm drainage outlet complete with plug

	Dimensions mm	Capacity Litres	Drainage Outlet
<b>DHT1A</b>	762L x 548W x 838H	120	Yes

**DHT1A** rectangular wash trough



227L

# DAIRY HYGIENE

227 litres



Rectangular Self Standing Wash Trough with lid

227 litre capacity

Double skinned for superior heat retention

Suitable for holding circulation wash water

Calibrated internal markings

One piece construction and smooth 'easy clean' surface

38mm drainage outlet complete with plug

	Dimensions mm	Capacity Litres	Drainage Outlet
<b>DHT2A</b>	940L x 762W x 838H	227	Yes

**DHT2A** rectangular wash trough




91L

# DAIRY HYGIENE



91 litres



**HN27A** trough style wash troughs

Trough style Wash Troughs

91 litre capacity

Single skin one piece construction and smooth 'easy clean' surface

38mm drainage outlet complete with plug

	Dimensions mm	Capacity Litres	Drainage Outlet
<b>HN27A</b>	775L x 546W x 373H	91	Yes



132L

**DAIRY HYGIENE**

132 litres



**HN33A** trough style wash troughs

Trough style Wash Troughs

132 litre capacity

Single skin one piece construction and smooth 'easy clean' surface

38mm drainage outlet complete with plug

	Dimensions mm	Capacity Litres	Drainage Outlet
<b>HN33A</b>	950L x 550W x 388H	132	Yes






209L

DAIRY HYGIENE

209 litres



**HN36A** trough style wash troughs

Trough style Wash Troughs

209 litre capacity

Single skin one piece construction and smooth 'easy clean' surface

38mm drainage outlet complete with plug

	Dimensions mm	Capacity Litres	Drainage Outlet
<b>HN36A</b>	970L x 685W x 482H	209	Yes



45L

# DAIRY HYGIENE

45 litres



Strong, lightweight design

45 litre capacity

Screw Cap lid

Steel grab handles

**CH50** churn

	Dimensions Dia. mm	Capacity Litres	Drainage Outlet
<b>CH50</b>	335 x 735H	45	NA

# OTHER PRODUCTS



**PERFO** ground stabilisation matting

Solid, hard-wearing matting for protecting grassland
Simple to install
Prevents erosion on wet ground surrounding drinking troughs and feeders
UV & Frost Resistant
Textured surface for safe grip and reduced risk of injury
Preserves the natural environment as grass grows back through the tiles
Maintains natural drainage by allowing water through

	Dimensions (single tile) mm	Dimensions As Supplied (made up)	Surface Area Per Pallet	Load Bearing Capability
<b>PERFO</b>	200 x 200 x 37	1210 x 810 6 x 4 Perfo tiles	Approx. 54m <sup>2</sup>	Up to 40 Tonnes/ m <sup>2</sup> ±



Are PAXTON Agricultural products recyclable?

All our products are made from Polyethylene (PE) which is 100% recyclable.



What proportion of the products are recycled materials?

Various ratios of recycled polymer are used in our products dependent on colour, customer requirements and the intended application. When requested at the point of order we can usually guarantee a recycled content of 100% on black products.



Are Paxton products suitable for pigs?

In most cases Paxton products are fine for use by pigs, however, we do not guarantee them against being chewed.



What is the Byelaw 30 Kit?

The Byelaw 30 Kit is used in order to comply with the Byelaw 30 Regulation and is specifically used when connecting a tank to a mains water supply. The Byelaw 30 kit maintains the quality of the water in the tank.

The kit prevents water contamination with an insect proof screened vent and prevents back-flow of stored water into the mains (potable) supply.

## Orders and delivery

All fully completed orders are processed within 24hrs. The majority of products are made to order. Please allow 2-3 weeks for delivery.

## Materials

### Durability

Moulded polyethylene (PE) is extremely durable with outstanding impact, fracture and shatter resistance properties. These mechanical properties are tested to BS 2782.

### Manufacturing Standard

(As applicable) All Paxton products are manufactured to BS EN ISO 9001:2000.

Plastic materials: Mechanical properties tested to BS 2782.

Hot dipped galvanised: BS 729

Powder coating: BS 3900

Zinc coating: BS 1706

### Weather Stability

PE is ideal for external applications. Materials used are UV stabilised to meet the demands of Northern Hemisphere weather conditions.

### Maintenance Free

The solid body colour is permanently moulded-in, eliminating the need for maintenance painting. Units are wear resistant; scratches and parking nudges are less evident.

### Recycling

Polyethylene (PE) is an environmentally friendly material and is 100% recyclable. Paxton products can be manufactured using recycled materials where appropriate.

### Cleaning

Products should be flushed with clean water and then washed with a mild detergent solution using a bristle brush or sponge. Care should be taken not to apply undue pressure that may damage labels. Flush clean with water after washing.

### Chemical Resistance

The material is resistant to most acids, salts and solvents. Environmental elements such as acid rain, soot, diesel fumes, salt and seawater will not corrode PE. Please visit our website for full details.

# APPENDIX

## Installation & User Guides

Copies of the following Installation and User Guides can be found on [www.paxtonagri.co.uk](http://www.paxtonagri.co.uk)

Sheep Dip Recommended Site Instructions

WT 75 & 120 Drinking Troughs

Perfo Ground Stabilisation Matting

Below Ground CT Water Tanks

Above Ground CT Water Tanks

## Conversion Guide

To convert litres to gallons multiply by 0.219

To convert millimetres to inches multiply by 0.0394

## Colours

As a special order, it is sometimes possible to produce other products in a colour shown in the chart. Please contact our Customer Services Department to discuss.

# OTHER INFORMATION



## Paxton

A division of Leaffield Environmental Ltd  
Leaffield Way, Leaffield Industrial Estate,  
Corsham, Wilts, SN13 9UD

Tel: 01225 816528 Fax: 01225 816501  
Email: [Paxton@leaffield-environmental.com](mailto:Paxton@leaffield-environmental.com)



@Paxton\_agri



[www.facebook.com/PaxtonAgriLtd](http://www.facebook.com/PaxtonAgriLtd)

[www.paxtonagri.co.uk](http://www.paxtonagri.co.uk)

